RILSAMID®

TECHNICAL DATA SHEET

RILSAMID® AMNO P20 TLD

POLYAMIDE 12 PELLET

RILSAMID® AMNO P20 TLD is a polyamide 12 compound. This natural plasticized grade is designed for injection molding.

Designation : ISO 16396 - PA12-P, M1G1HLR, C12-005

TYPE

PA12-P

MAIN APPLICATIONS

- industry - distribution
- auto - fluid connectors
- auto - others injection

DELIVERY FORM

- Pellets

TRANSFORMATION PROCESSES

- Injection Molding

ADDITIVES

- Heat Stabilized
- Light Stabilized
- Plasticizer
- Release agent

RHEOLOGICAL PROPERTIES

PROPERTIES	TYPICAL VALUE	UNIT	TEST STANDARD
Melt volume flow rate (MVR), 235°C / 2.16 kg (455°F / 4.4 lb)	44	cm^3/10min	ISO 1133
Shrinkage, parallel (t+24h)	1.3	%	ISO 294-4
Shrinkage, normal (t+24h)	1.5	%	ISO 294-4

MECHANICAL PROPERTIES

PROPERTIES	TYPICAL VALUE	UNIT	TEST STANDARD
Charpy unnotched impact strength, 23°C (73°F)	No break / No break		ISO 179 1eU
Charpy unnotched impact strength, -30°C (-22°F)	No break / No break		ISO 179 1eU
Nominal strain at break, 23°C (73°F)	> 50 / > 50	%	ISO 527-1/-2
Yield strain, 23°C (73°F)	20 / 20	%	ISO 527-1/-2
Yield stress, 23°C (73°F)	31 / 30	MPa	ISO 527-1/-2
Tensile modulus, 23°C (73°F)	620 / 550	MPa	ISO 527-1/-2
Charpy notched impact strength, 23°C (73°F)	- / 9	kJ/m2	ISO 179 1eA
Charpy notched impact strength, -30°C (-22°F)	3 / 4	kJ/m2	ISO 179 1eA
Flexural modulus, 23°C (73°F)	- / 500	MPa	ISO 178
Stress at break, 23°C (73°F)	- / 58	MPa	ISO 527-1/-2

*DRY: Dry As Molded (DAM) if pellet / Dry if powder.
COND: Conditionned.

RILSAMID® AMNO P20 TLD

THERMAL PROPERTIES

PROPERTIES	TYPICAL VALUE	UNIT	TEST STANDARD
Vicat softening temperature, 50N at 50°C/h	134	°C	ISO 306
Heat deflection temperature, 0.45 MPa	130	°C	ISO 75-1/-2
Heat deflection temperature, 1.8 MPa	48	°C	ISO 75-1/-2
Melting temperature, 10°C/min	173	°C	ISO 11357-1/-3

ELECTRICAL PROPERTIES

PROPERTIES	TYPICAL VALUE	UNIT	TEST STANDARD
Surface resistivity, 23°C (73,4°F)	- / 1.0E+12	ohm/sq	IEC 62631-3-2
Volumic (transversal) resistivity, 23°C (73,4°F)	- / 1.0E+10	ohm.m	IEC 62631-3-1
Comparative tracking index, 23°C (73,4°F)	- / 600		IEC 60112
Relative permittivity, 100Hz	- / 8		IEC 62631-2-1
Relative permittivity, 1Mhz	- / 4		IEC 62631-2-1
Dissipation factor, 100Hz	2010 / -	E-4	IEC 62631-2-1
Dissipation factor, 1Mhz	595 / -	E-4	IEC 62631-2-1
Dielectric Strength, 23°C (73,4°F)	- / 26	kV/mm	IEC 60243-1

*DRY: Dry As Molded (DAM) if pellet / Dry if powder.
COND: Conditionned.

OTHER PROPERTIES

PROPERTIES	TYPICAL VALUE	UNIT	TEST STANDARD
Density, 23°C (73°F)	1.02	g/cm³	ISO 1183-1
Water absorption, at equilibrium at 23°C (73°F) / Immersion	1.4	%	ISO 62

PACKAGING

Available packaging:
- 25 kg / 55 lb bags

SHELF LIFE


Two years from the date of delivery, when stored properly (sealed bags, appropriate moisture, UV protection and temperature). For any use above this limit, please refer to our technical services.


PROCESSING CONDITIONS:

- Typical melt temperature (Min / Recommended / Max) - Injection Molding: 210°C / 230°C / 260°C (410°F / 445°F / 500°F)
- Typical mold temperature - Injection molding: 20-60°C (70-140°F)
- Drying time and temperature: 80-90°C (175-195°F) / 4-6 hours


DIAGRAMS

RILSAMID® AMNO P20 TLD

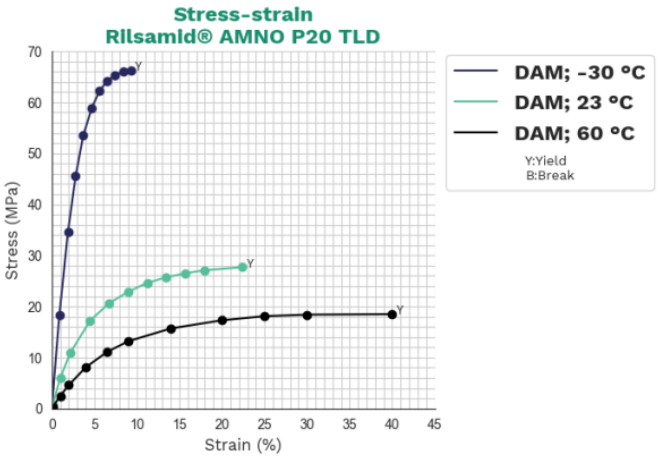

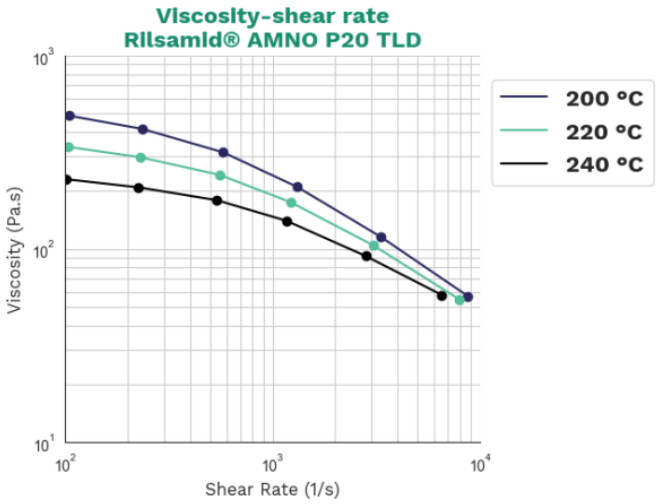



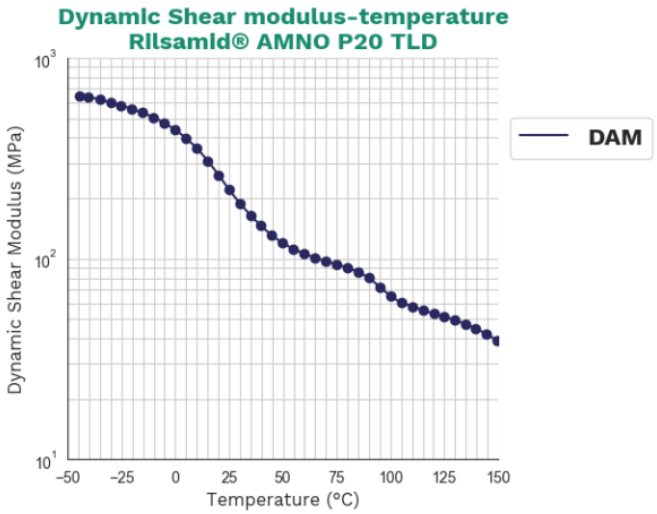

Headquarters: Arkema France
51, Esplanade du Général de Gaulle
92800 Puteaux – France
T +33 (0)1 49 00 80 80

Disclaimer - Please consult Arkema's disclaimer regarding the use of Arkema's products on https://www.arkema.com/global/en/products/product-safety/disclaimer/ which is incorporated herein by reference and made a part hereof.
Arkema France, a French société anonyme registered at the Trade and Companies Register of Nanterre under the number 319 632 790
arkema.com